



Parata Max® Lite Vial Filling Robot

Key Features

Bang for Your Buck: Max Lite offers industry standard accuracy, speed, and output.

Continuous Operation: Two-sided design separates inventory and dispensing. Max Lite continues to run while you replenish vials, caps, and drugs. Max Lite's low-touch operation is largely attributed to its ability to cap and sort filled vials.

Verification Camera: An internal camera captures an image of every filled vial for easy verification and record-keeping.

Internet of Things Connection: Parata Pulse keeps an eye on the health of your Max Lite for reliable reporting and business efficiency. Request help from Parata right from Max Lite's touchscreen without ever picking up the phone.

Rx Volume Automated Standard Configuration	Up to 50% of oral solids on average
Storage Capacity	88 super cells and 22 standard cells
Accuracy	232 completed vials stored before requiring attendance
	100% accurate for drug and dose when proper processes are followed by the pharmacy
Optional Complements	Patented locking drug cells. Vuca MedsOnCue QR codes.
Certifications	UL certified and UL GREENGUARD Gold Certification for indoor air quality
Pharmacy Software Integrations	Parata integrates with 100+ host systems
Certified Vial Providers	Altium Healthcare, Berry, and Centor/Rexam
Network Requirements	One Ethernet RJ-45 jack and one IP address on local network
Power Requirements	120V, 20A, 60Hz with one dedicated NEMA 5-20 receptacle located in the ceiling above the unit

Parata Max® Lite Vial Filling Robot



Collect and store an image of every filled vial for accuracy and safety.




Overflow bin and exception carousel allow Max Lite to keep running even when shelves are full or scripts require review.



Navigate workflow with intuitive touchscreen and software, on-demand access to training, documentation, and service.



Enter all unique NDC information with one, quick scan using the new 2D barcode scanner.

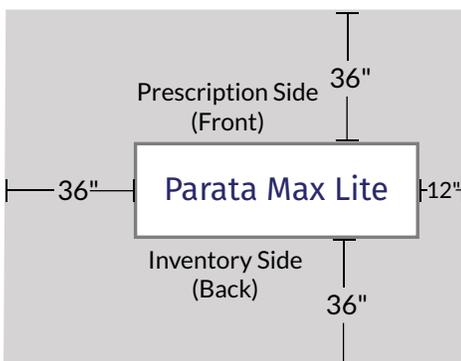

Dimensions	Width (in)	Height (in)	Depth (in)
Parata Max Lite (unit)	79-3/8	79-1/4	28-3/4
Total Space	127-3/8	91	100-3/4
Weight	Unloaded (lb)	Loaded (lb)	
	2,106	~2,378	